

# Earth Science Regents Locating an Epicenter

Name \_\_\_\_\_

Period \_\_\_\_\_

Copyright 2003 by D. Patrick

## Introduction:

As you have learned in class, earthquakes are vibrations caused by large releases of energy. These energy releases can occur as a result of fault movements, asteroid impacts, volcanic eruptions, and movements of magma, as well as by explosions. As a result, vibrations can begin both in and on the Earth's crust. The energy released radiates away from the point of origin, the **focus**. Commonly, when describing the *location* of an earthquake, scientists and the media often talk about the earthquake's **epicenter**, the point on the Earth's surface directly above the focus.

Earthquake energy can be recorded on a **seismograph**, producing a **seismogram**. Seismographs can "pick up" several types of energy **waves**, which travel through the Earth, and radiate in all directions from the focus. Two of these waves are used to locate earthquake epicenters:

- **"P"-waves or longitudinal waves:** "P" stands for primary. These waves travel fastest and arrive at seismographs first. They are compressional ("push-pull") waves.
- **"S"-waves or transverse waves:** "S" stands for secondary. These waves travel more slowly and arrive at seismographs after P-waves. They are perpendicular ("side-to-side") waves.

As you may recall, we use travel time graphs (Page 11 ESRT's) to show how long it takes each type of seismic wave to travel a distance, measured on Earth's surface. The difference between the *S-wave* arrival time and the *P-wave* arrival time corresponds to the distance of the seismograph from the focus of the earthquake. However, these waves can arrive at a seismograph from **any direction!** Thus, one seismograph is not enough to determine the epicenter of an earthquake. A second seismogram, recorded in a different location, can narrow down the possible location to some degree, but at least three seismograms are required in order to accurately plot the epicenter.

In this lab, you will use seismograms from three locations to determine the epicenter of an earthquake. You will use the *P-* and *S-wave* arrival time difference to determine distance to epicenter, then use a compass to record the distance radius measured by each station. Remember, accuracy is important- take care to make accurate measurements!

## Materials:

- 3 seismograms from the same earthquake
- Safe drawing compass
- P-* and *S-wave* travel time curve
- Map for plotting the earthquake epicenter
- Straight edge

## Procedure:

1. Examine Figure 1, which shows seismograms of an earthquake recorded at three different locations. Note that the first set of zigzags at each city indicate the arrival of *P-waves*, and the second set of zigzags indicate the arrival of *S-waves*. In order to determine the time of arrival for each *P-* and *S-wave*, move your finger in a straight line down to the **time axis** beneath the wave.

2. Estimate to the nearest ten seconds, the times of the first arrival of the *P-waves* and *S-waves* at each station in Figure 1. Then, subtract the *S* minus *P*:

3. Now use the **S** minus **P** times and the **P- and S-wave Travel Time Curve** (Page 11 ESRT's) to estimate the distance from the epicenter for each location. Refer to the following procedure to accomplish this:


- Lay a strip of blank paper along the time axis of the Travel Time Curve (Page 11 ESRT's). Mark two dots on the edge of the paper corresponding to the **S-P** time difference calculated for the first location above.
- Keeping the edge of the paper parallel to the vertical lines on the graph, slide the paper along the **S** and **P** curves until the two dots lie exactly on the **S** and **P** curves.
- A vertical line through the **S** and **P** curves at these points should intersect the horizontal axis. This is the distance between the seismograph at this location and the earthquake's epicenter.
- Record this distance in the table below. Repeat this procedure for the next two **S-P** times.

4. Next, find the earthquake's epicenter, using the distances just obtained and the procedure below.

- Use the **scale** in Figure 2 to set the appropriate radius on your compass. You can do this by opening your compass to a length equal to the **Distance to Epicenter** determined for **San Jose, Costa Rica**, as recorded in the chart above.
  - **NOTE:** You may notice that the distance is LONGER than the scale. Open the compass to the entire length of the scale (3,000 km). Then, move the compass to the LEFT until the point that WAS on 3,000 touches 0. Then, continue opening it the REMAINING length.
- Place your compass point on the circle labeled **San Jose** on your map. Scribe a complete circle around the seismic station.
- Repeat this procedure for **New York** and **San Francisco**.
- The circles you should draw should intersect near one point. **This point is the epicenter!**

# Observations

*Figure 1: Seismograms Recorded at Three Different Locations for a Single Event*

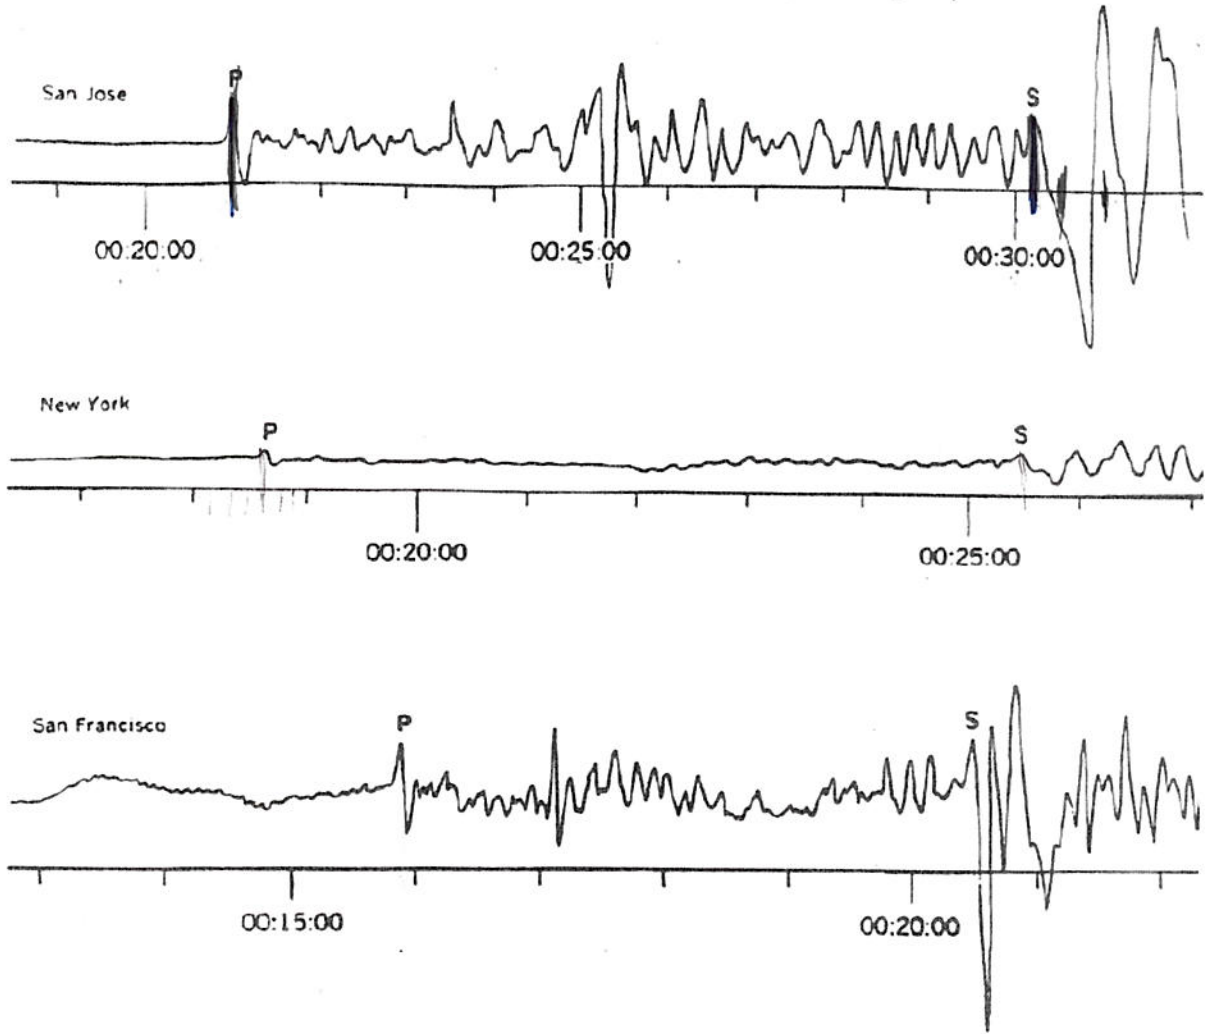

# Earthquake P-Wave and S-Wave Travel Time

